


**SPSKR100**  
 Design by Manuel Vivian

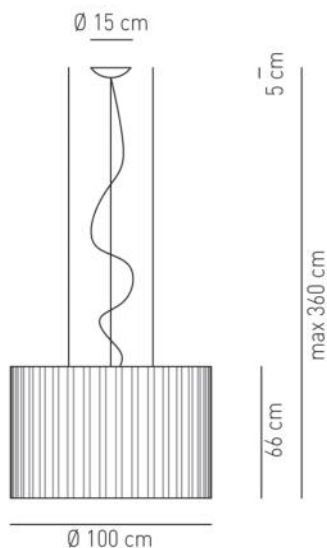
Collection of suspended lamps in flame-retardant TREVIRA®CS fabric (100% polyester Glow wire 960 °C), available in several sizes and colours. The fabric can also come in a double-layer version with an exterior black net fabric.

Typology: SUSPENDED

**Ratings**

- Built in **LED** module
- CCT 3000 K
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Dimmable DALI LED driver
- Steel frame, painted
- Cone in pongé fabric and light covering in jersey

kg 12.5 m³ 1.06


**Product code composition**
**SKIRT** / with upward and downward lighting / diffuser INCLUDED / DRIVER INCLUDED

Type	Article	Exterior Net	Fabric Colours	Source
SP	SKR 100 LED	NE black net	BC white	LED 98W - diffused beam 3000K*, 4000K
		XX no black net	AR orange	
			BL blue	
			GR light grey	
			RS red	
			VE light green	



IP20

CRI90


**LED**

~10719 lm\* 109 lm/W\*

110-240VAc

example composition code SP SKR100LED XX RS




**Equivalent Sound Absorption Area (A) in m<sup>2</sup> per lamp**


FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,30	0,56	0,89	1,22	1,33	1,56	2,78	1,23	1,15


**Equivalent Sound Absorption Area (A) in m<sup>2</sup> per lamp**

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,41	0,98	1,26	1,49	1,66	1,89	2,96	1,52	1,47

**Available colors**

 BC  
White

 AR  
Orange

 BL  
Blue

 GR  
Light grey

 RS  
Red

 VE  
Light green

 Black net over a  
white fabric NEBC

SPSKR100LED\_ \_ \_ \_

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.