



SPVEL100 Design by Manuel Vivian

Collection of ceiling and suspended lamps. The radial diffuser and light covering are treated with a flame-retardant (Glow wire 960 °C and 750°C respectively). Available in several colours and sizes.


Typology: SUSPENDED

Ratings

- E27
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame, painted
- Radial cone diffuser in pongé fabric and light covering in jersey

Product code composition

VELVET / diffusore INCLUSO, con illuminazione verso alto e basso / *diffuser INCLUDED, with upward and downward lighting*

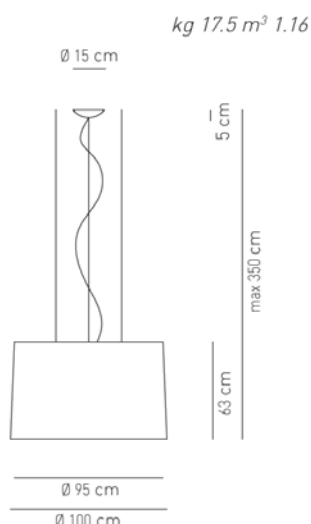

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
SP	VEL 100 E27	BC ice white	BC white	E27 4 x Max 20W LED or 4 x Max 57W halogen
		BA ivory white	GI gold yellow	
		BL blue	MA brown	
		MA brown	MT brick red	
		NE black	NE black	



IP20 +LED

220-240V_{ac}

example composition code SP VEL100E27 MA BC



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,58	0,89	0,95	0,85	0,87	1,27	1,87	1,04	0,89

Available lampshade colors



BC
Ice white



BA
Ivory white



BL
Blue




MA
Brown




NE
Black

Available radial diffuser colors



BC
White



BW
Warm white

SPVEL100E27_ _ _ _

CUSTOMER _____

NOTES _____

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

AXO LIGHT srl, via Moglianese 44 - 30037 Scorzè (VE), Italy - T +39 041 5845193 - F +39 041 5845060

axolight@axolight.it - www.axolight.it