



**PLUL1160 - recessed**  
**PLUL2160 - recessed**  
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.  
 Available in several colours and sizes.  
 Available with sound absorbing panel option.

Typology: WALL, CEILING LAMP

#### Ratings


- Built in **LED** module
- CCT 3000 K or 2700K
- Wallward light (wall), downlight or uplight (ceiling)
- Surface installation over holes (legs) and in Ceiling cut-out (recessed canopy)
- Supply voltage 24VDC
- Switch mode: on-off
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

PL UL 1: kg 5 m3 0.280  
 PL UL 2: kg 5.4 m3 0.280

Product code composition

**U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED**

Type	Article	Colours	Version	Source
PL	UL 1 160 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 102W - diffused beam 3000K*, 2700K 24VDC  other CCT options available upon request
	UL 2 160 LED (h25 cm)	RU rust brown		

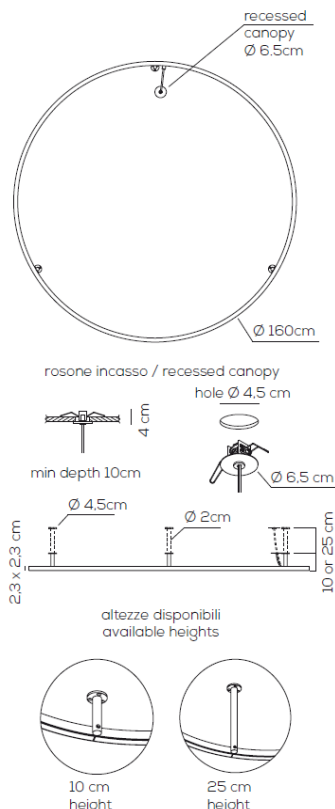

CE III IP20 CRI90  ~8575 lm\* 84 lm/W\* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).  
 Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code PL UL1160LED RU IN

-for optional drivers or dimming technology please refer to our pricelist or contact our representatives

-sound absorbing option upon request- for more information see [www.axolight.eu/u-light/u-light-sound-absorbing.pdf](http://www.axolight.eu/u-light/u-light-sound-absorbing.pdf)

#### Available colors



AN  
Anthracite  
grey



RU  
Rust brown



Sound  
absorbing  
option upon  
request

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

PLUL \_ 160LED \_ \_ IN

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.