

### SP ULA 180

Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.  
Available in several colours and sizes.  
Available with sound absorbing panel option.

Typology: SUSPENDED LAMP

### Ratings

- Built in **LED** module
- CCT 3000 K or 2700K
- Downlight or uplight
- Surface installation over holes
- Supply voltage ~100-240VAC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

kg 10,5 m3 0,330


Product code composition

U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 180 LED	AN anthracite grey RU rust brown	XX standard canopy	LED 153W - diffused beam <b>3000K*, 2700K</b> other CCT options available upon request

**LED** ~9800 lm\* 64 lm/W\* 100-240VAc

-sound absorbing option upon request- for more information see [www.axolight.eu/u-light/u-light-sound-absorbing.pdf](http://www.axolight.eu/u-light/u-light-sound-absorbing.pdf)

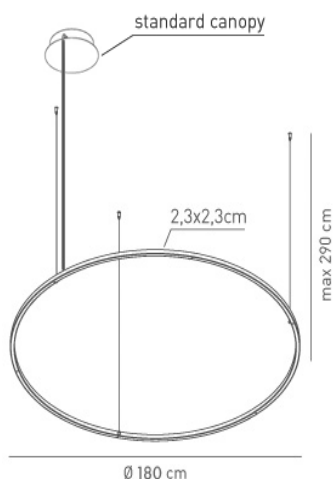

rosone standard /standard canopy



### Available colors



AN  
Anthracite  
grey

RU  
Rust brown

Sound  
absorbing  
option upon  
request

SPULA180LED \_ \_ XX

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.