



SPURBANP

Design by Dima Loginoff

Collection consisting of aluminium ceiling lamps and suspended lamps.
Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings

- Built in line voltage **LED** module
- CCT 3000 K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off, dimmable trailing edge
- Die cast aluminium body, painted
- Opalescent diffuser


SP URBAN P

kg 1,9 m³ 0,02

Product code composition

URBAN / solo con illuminazione verso il basso / downward lighting only

Type	Article	Colours	Finishing	Source
SP	URBAN P	BC wrinkled white	XX	LED 15W - diffused beam 3000K* 2700K
		BR matt bronze		
		NI matt nickel		

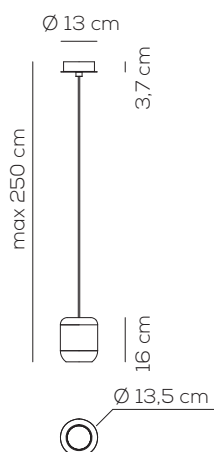

IP20 CRI90




220-240VAC **LED**

~1375 lm* ~92 lm/W*

example composition code SP URBANP BR XX LED

Available colors



BC
Wrinkled
white



BR
Matt
bronze



NI
Matt
nickel

SPURBANP _ _ XXLED

CUSTOMER _____ NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.