



A selection of luminaires with exceptional optical and construction quality, designed to meet the lighting needs of outdoor spaces in residential and hospitality settings.

IP65 bollards


Light Source: LED (led driver not included)

CCT
2700K _ 540 lm
3000K _ 560 lm

8,2W 24VDC CRI 85
Parallel wiring


Code Construction

BOBOL XXX XX XX XXX

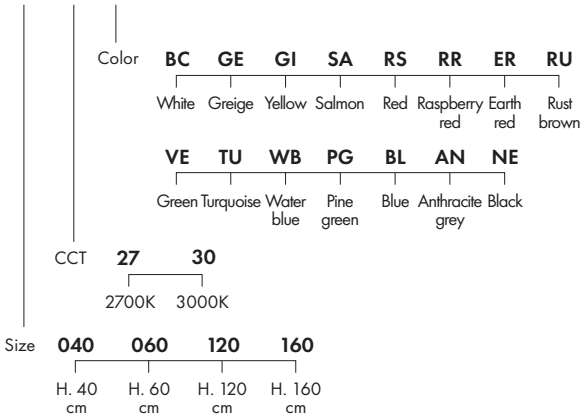


Accessories


ACZCP001XXXXX
Anchor bolt
for concrete plinth



ACZCP002XXXXX
Earth spike
Compatible only with 40 and 60 cm versions



		Color	
Water blue		Raspberry red	
Pine green		Earth red	
Blue		Rust brown	
Anthracite grey		Green	
Black		Turquoise	
		White	
		Greige	
		Yellow	
		Salmon	
		Red	

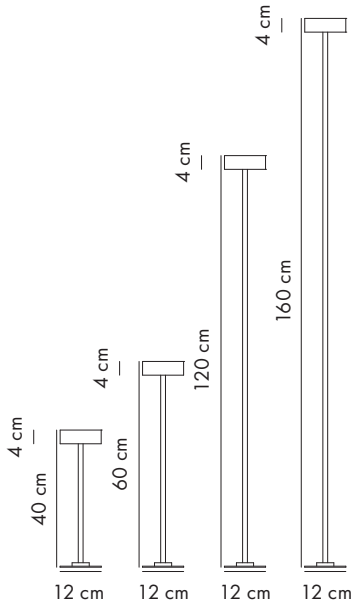

Made-to-measure cable
available on request

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.



Drivers

24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-8	Ø 70
CEDALV00007	On/off IP67 - Max 36W	1-4	Ø 44
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-2	Ø 45
CEDALV00004	Dimmable IP67, DALI2 - Max 24W	1-2	Ø 48

Ecodesign and Energy Labelling

BOL: light source with energy class **F** (2700K-3000K)



Light source (LED only)
non-replaceable by end
user.