



Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Color

White



Satin gold



Copper



Bronze



Black



Trimless downlights

Light Source: LED (led driver not included)

LESS 6 CCT

2700K _ 540 lm
3000K _ 600 lm

6W 500mA (V_f 9V) CRI 98
Series wiring

LESS 10 CCT

2700K _ 840 lm
3000K _ 930 lm

10W 500mA (V_f 18V) CRI 93
Series wiring


LESS 724 CCT

2700K _ 590 lm
3000K _ 650 lm


7W 24VDC CRI 93
Parallel wiring

Code Construction


FALES XXX XX X XX X X

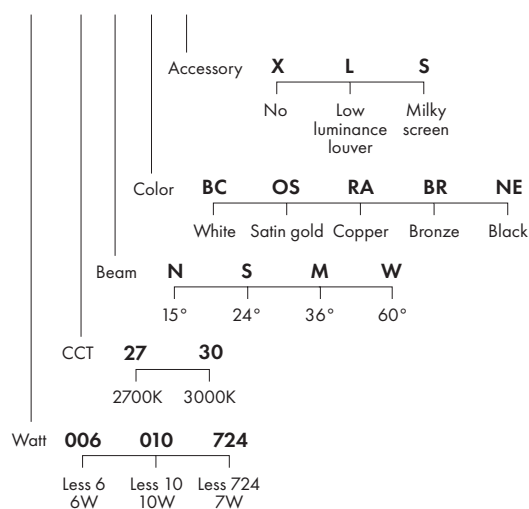

LESS 6




LESS 10 - LESS 724



Accessories


LESS 6

ACZQH001XXXXX White
ACZQH001BXXXX Black
Plasterboard recessing frame



LESS 10 - LESS 724

ACZQC003XXXXX White
ACZQC003BXXXX Black
Plasterboard recessing frame



Low luminance louver



Milky screen



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1-2 LESS 6 1 LESS 10	Ø 30
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-4 LESS 6 1-2 LESS 10	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-2 LESS 6 1 LESS 10	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-4 LESS 6 1-2 LESS 10	Ø 56
24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2 LESS 724	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-10 LESS 724	Ø 70
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-3 LESS 724	Ø 45

Ecodesign and Energy Labelling

LESS 6: light source with energy class **F** (2700K-3000K)

LESS 10, LESS 724: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.