



Color

White

Greige

Natural  
brass

## Rust

Inox AISI  
316L

Anthracite  
grey

Black

**Light Source:** LED (led driver not included)

## CCT

2700K\_ 540 lm  
3000K\_ 600 lm

## CCT




2700K\_ 840 lm  
3000K\_ 930 lm

## CCT

2700K\_ 590 lm  
3000K\_ 650 lm

7W 24VDC CRI 93  
Parallel wiring

FAMIT   XXX   XX   X   XX   X   X

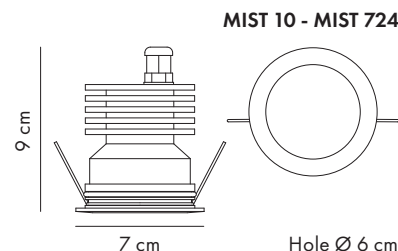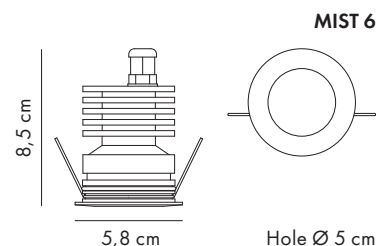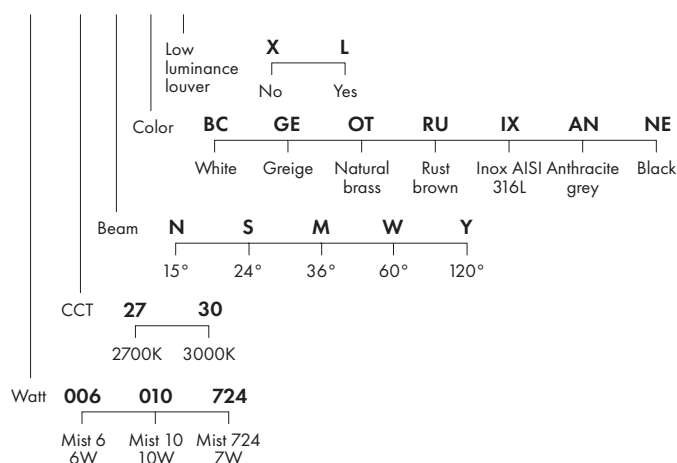


Made-to-measure cable  
available on request

## Accessories


## MIST 6

**ACCSDS10XXXX**  
Recessing box



## MIST 10 - MIST 724

ACCSXJ01XXXX  
Recessing box



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

### Drivers

| 500mA              |                                                | Min-Max fixtures          | Hole mm |
|--------------------|------------------------------------------------|---------------------------|---------|
| <b>CEDLTC00135</b> | On/off IP20 - Max 14W                          | 1-2 MIST 6<br>1 MIST 10   | Ø 30    |
| <b>CEDALV00006</b> | On/off IP67 - Max 20W                          | 1-3 MIST 6<br>1-2 MIST 10 | Ø 44    |
| <b>CEDLTC00140</b> | Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W | 1-4 MIST 6<br>1-2 MIST 10 | Ø 72    |
| <b>CEDACT00002</b> | Dimmable IP20, PUSH, DALI 2 - Max 12W          | 1-2 MIST 6<br>1 MIST 10   | Ø 36    |
| <b>CEDLTC00142</b> | Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W      | 1-4 MIST 6<br>1-2 MIST 10 | Ø 56    |
| <b>CEDALV00003</b> | Dimmable IP67, DALI 2 - Max 10W                | 1-2 MIST 6<br>1 MIST 10   | Ø 44    |
| 24VDC              |                                                | Min-Max fixtures          | Hole mm |
| <b>CEDLTC00136</b> | On/off IP20 - Max 20W                          | 1-2 MIST 724              | Ø 60    |
| <b>CEDLTC00137</b> | On/off IP20 - Max 70W                          | 1-10 MIST 724             | Ø 70    |
| <b>CEDALV00007</b> | On/off IP67 - Max 36W                          | 1-5 MIST 724              | Ø 44    |
| <b>CEDALV00001</b> | Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W  | 1-3 MIST 724              | Ø 45    |
| <b>CEDALV00004</b> | Dimmable IP67, DALI2 - Max 24W                 | 1-3 MIST 724              | Ø 48    |

### Ecodesign and Energy Labelling

**MIST 6:** light source with energy class **F** (2700K-3000K)

**MIST 10, MIST 724:** light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)  
non-replaceable by end  
user.