



Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Color



- White
- Satin gold
- Copper
- Bronze
- Black

Semi-recessed downlights

Light Source: LED (led driver not included)

NEST 6 CCT 2700K _ 540 lm 3000K _ 600 lm 6W 500mA (V _f 9V) CRI 98 Series wiring	NEST 10 CCT 2700K _ 840 lm 3000K _ 930 lm 10W 500mA (V _f 18V) CRI 93 Series wiring	NEST 724 CCT 2700K _ 590 lm 3000K _ 650 lm 7W 24VDC CRI 93 Parallel wiring
--	---	--

Code Construction

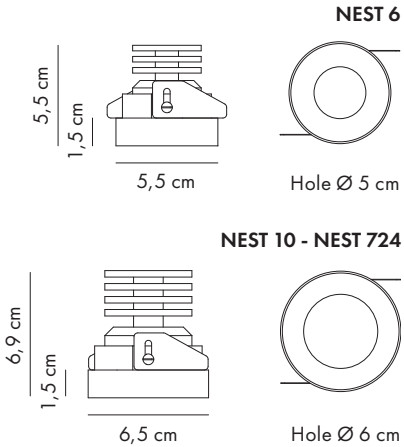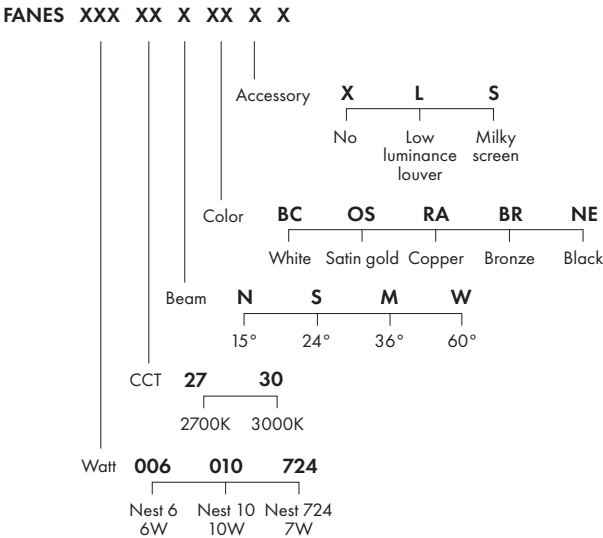

Accessories

NEST 6 ACCSFB01XXXXX Recessing box	NEST 10 - NEST 724 ACCSFX01XXXXX Recessing box	Low luminance louver	Milky screen

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1-2 NEST 6 1 NEST 10	Ø 30
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-4 NEST 6 1-2 NEST 10	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-2 NEST 6 1 NEST 10	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-4 NEST 6 1-2 NEST 10	Ø 56
24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2 NEST 724	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-10 NEST 724	Ø 70
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-3 NEST 724	Ø 45

Ecodesign and Energy Labelling

NEST 6: light source with energy class **F** (2700K-3000K)

NEST 10, NEST 724: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.