



Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

## Color

White



Satin gold



Copper



Bronze



Black



## Recessed optic downlights

**Light Source:** LED (led driver not included)

### POT 6

#### CCT

2700K \_ 540 lm

3000K \_ 600 lm

6W 500mA (V<sub>f</sub> 9V) CRI 98

Series wiring

### POT 10

#### CCT

2700K \_ 840 lm

3000K \_ 930 lm

10W 500mA (V<sub>f</sub> 18V) CRI 93

Series wiring

### POT 724

#### CCT

2700K \_ 590 lm


3000K \_ 650 lm

7W 24VDC CRI 93


Parallel wiring

## Code Construction



FAPOT XXX XX X XX X X

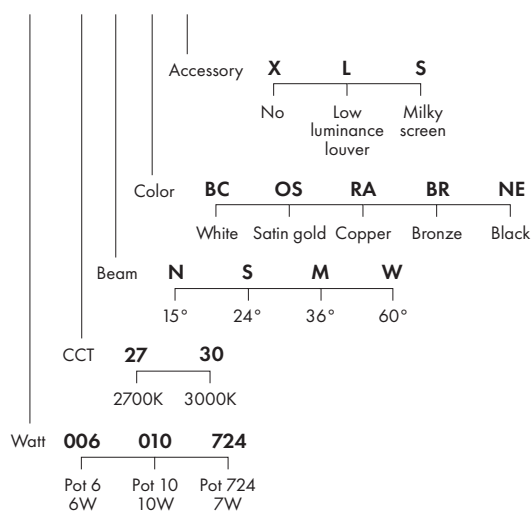

### POT 6



### POT 10 - POT 724




## Accessories

### POT 6

ACCSFB01XXXXX


Recessing box



### POT 10 - POT 724

ACCSFX01XXXXX

Recessing box



Low luminance louver



Milky screen



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

## Drivers

| 500mA              |                                                | Min-Max fixtures        | Hole mm |
|--------------------|------------------------------------------------|-------------------------|---------|
| <b>CEDLTC00135</b> | On/off IP20 - Max 14W                          | 1-2 POT 6<br>1 POT 10   | Ø 30    |
| <b>CEDLTC00140</b> | Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W | 1-4 POT 6<br>1-2 POT 10 | Ø 72    |
| <b>CEDACT00002</b> | Dimmable IP20, PUSH, DALI 2 - Max 12W          | 1-2 POT 6<br>1 POT 10   | Ø 36    |
| <b>CEDLTC00142</b> | Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W      | 1-4 POT 6<br>1-2 POT 10 | Ø 56    |
| 24VDC              |                                                | Min-Max fixtures        | Hole mm |
| <b>CEDLTC00136</b> | On/off IP20 - Max 20W                          | 1-2 POT 724             | Ø 60    |
| <b>CEDLTC00137</b> | On/off IP20 - Max 70W                          | 1-10 POT 724            | Ø 70    |
| <b>CEDALV00001</b> | Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W  | 1-3 POT 724             | Ø 45    |

## Ecodesign and Energy Labelling

**POT 6:** light source with energy class **F** (2700K-3000K)

**POT 10, POT 724:** light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)  
non-replaceable by end  
user.