


A selection of luminaires with exceptional optical and construction quality, designed to meet the lighting needs of outdoor spaces in residential and hospitality settings.

IP65 ceiling lamps

Light Source: LED (led driver not included)


RUFY 10	RUFY 724
CCT	CCT
2700K _ 840 lm	2700K _ 590 lm
3000K _ 930 lm	3000K _ 650 lm
10W 500mA (V _f 18V) CRI 93	7W 24VDC CRI 93
Series wiring	Parallel wiring

Code Construction

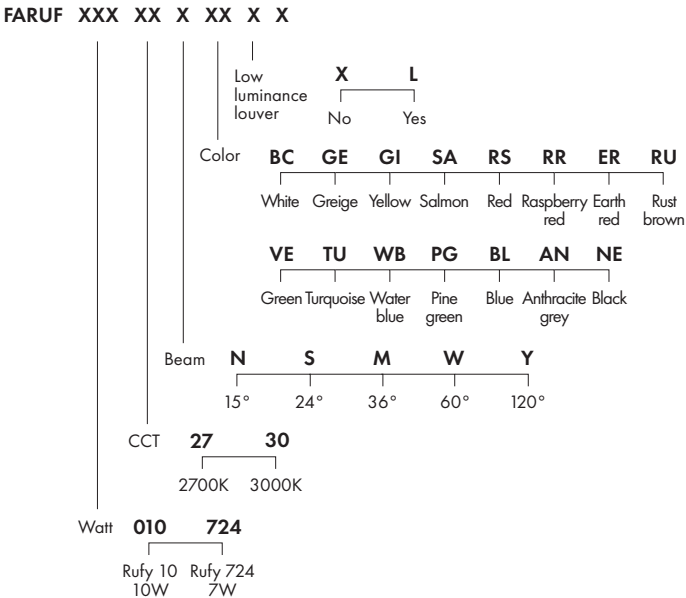

Color		
Water blue	Raspberry red	White
Pine green	Earth red	Greige
Blue	Rust brown	Yellow
Anthracite grey	Green	Salmon
Black	Turquoise	Red

RUFY 10 - RUFY 724



Made-to-measure cable available on request

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.



Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1 RUFY 10	Ø 30
CEDALV00006	On/off IP67 - Max 20W	1-2 RUFY 10	Ø 44
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-2 RUFY 10	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1 RUFY 10	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-2 RUFY 10	Ø 56
CEDALV00003	Dimmable IP67, DALI 2 - Max 10W	1 RUFY 10	Ø 44
24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2 RUFY 724	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-10 RUFY 724	Ø 70
CEDALV00007	On/off IP67 - Max 36W	1-5 RUFY 724	Ø 44
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-3 RUFY 724	Ø 45
CEDALV00004	Dimmable IP67, DALI2 - Max 24W	1-3 RUFY 724	Ø 48

Ecodesign and Energy Labelling

RUFY 10, RUFY 724: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.