

Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Projectors

Light Source: LED (led driver not included)

SLIM S6-R6

CCT
2700K _ 540 lm
3000K _ 600 lm

6W 500mA (V_f 9V) CRI 98
Series wiring

SLIM S10-R10


CCT
2700K _ 840 lm
3000K _ 930 lm

10W 500mA (V_f 18V) CRI 93
Series wiring

Color


- White
- Satin gold
- Copper
- Bronze
- Black

Code Construction

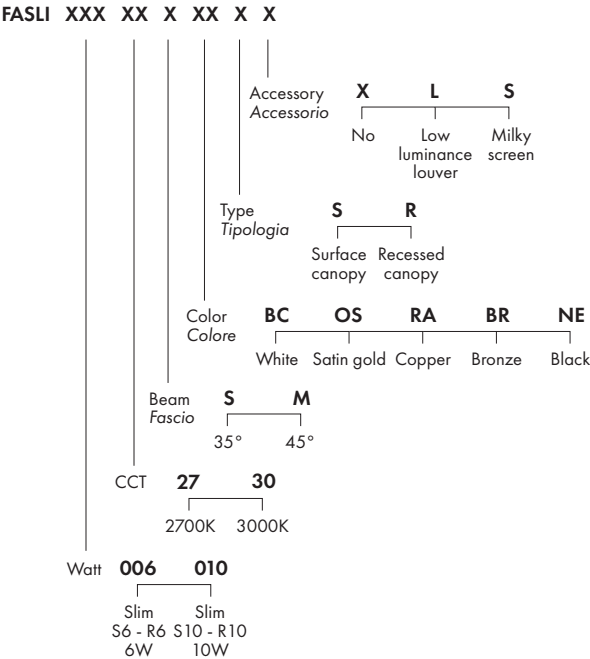

Accessories

- Low luminance louver
- Milky screen

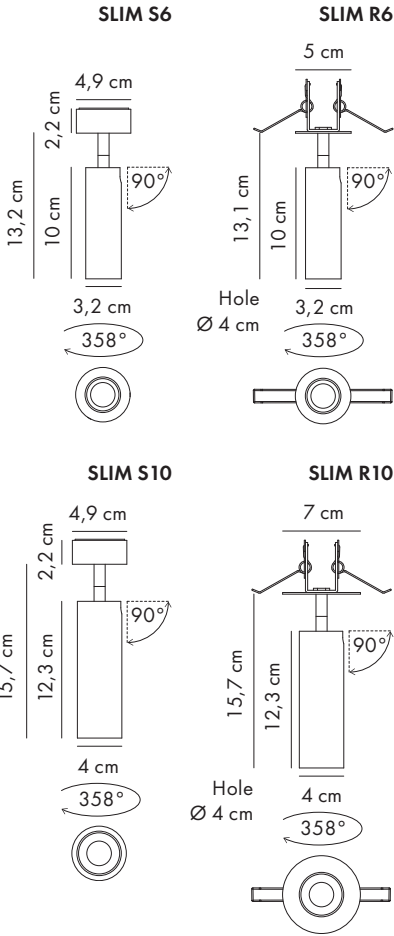

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1-2 SLIM S6-R6 1 SLIM S10-R10	Ø 30
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-4 SLIM S6-R6 1-2 SLIM S10-R10	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-2 SLIM S6-R6 1 SLIM S10-R10	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-4 SLIM S6-R6 1-2 SLIM S10-R10	Ø 56

Ecodesign and Energy Labelling

SLIM S6-R6: light source with energy class **F** (2700K-3000K)

SLIM S10-R10: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.