

A selection of luminaires with exceptional optical and construction quality, designed to meet the lighting needs of outdoor spaces in residential and hospitality settings.


IP67 uplights

Light Source: LED (led driver not included)


HOP 6	HOP 10	HOP 724
CCT	CCT	CCT
2700K _ 540 lm	2700K _ 840 lm	2700K _ 590 lm
3000K _ 600 lm	3000K _ 930 lm	3000K _ 650 lm
6W 500mA (V _f 9V) CRI 98	10W 500mA (V _f 18V) CRI 93	7W 24VDC CRI 93
Series wiring	Series wiring	Parallel wiring

Color	
White	
Greige	
Natural brass	
Rust brown	
Inox AISI 316L	
Anthracite grey	
Black	

Code Construction

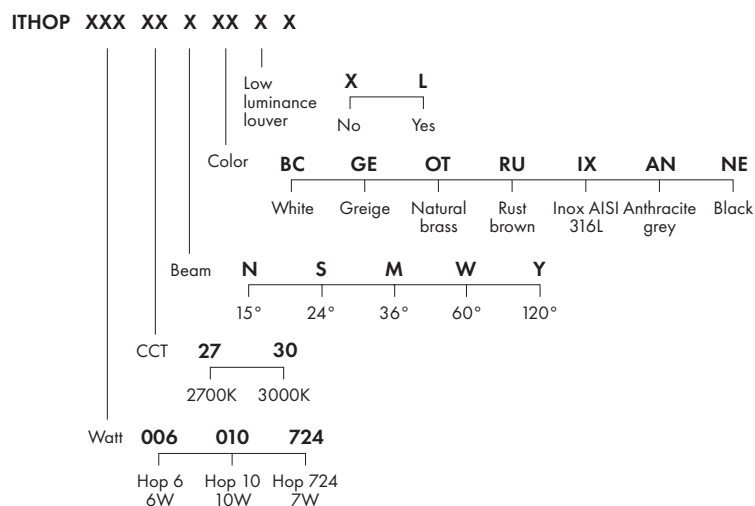


HOP 6



Installation with recessing box

HOP 10 - HOP 724




Installation with recessing box


Made-to-measure cable available on request

Accessories

HOP 6
ACCSDS10XXXXX
Recessing box



HOP 10 - HOP 724
ACCSXJ01XXXXX
Recessing box



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1-2 HOP 6 1 HOP 10	Ø 30
CEDALV00006	On/off IP67 - Max 20W	1-3 HOP 6 1-2 HOP 10	Ø 44
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-4 HOP 6 1-2 HOP 10	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-2 HOP 6 1 HOP 10	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-4 HOP 6 1-2 HOP 10	Ø 56
CEDALV00003	Dimmable IP67, DALI 2 - Max 10W	1-2 HOP 6 1 HOP 10	Ø 44
24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2 HOP 724	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-10 HOP 724	Ø 70
CEDALV00007	On/off IP67 - Max 36W	1-5 HOP 724	Ø 44
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-3 HOP 724	Ø 45
CEDALV00004	Dimmable IP67, DALI2 - Max 24W	1-3 HOP 724	Ø 48

Ecodesign and Energy Labelling

HOP 6: light source with energy class **F** (2700K-3000K)

HOP 10, HOP 724: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.