



A selection of luminaires with exceptional optical and construction quality, designed to meet the lighting needs of outdoor spaces in residential and hospitality settings.

IP65 wall lamps

Light Source: LED (led driver not included)

WALLY S
CCT
2700K _ 590 lm
3000K _ 650 lm

7W 24VDC CRI 93
Parallel wiring



WALLY D
CCT
2700K _ 2 x 590 lm
3000K _ 2 x 650 lm

2 x 7W 24VDC CRI 93
Parallel wiring

		Color	
Water blue		Raspberry red	
Pine green		Earth red	
Blue		Rust brown	
Anthracite grey		Green	
Black		Turquoise	
		White	
		Greige	
		Yellow	
		Salmon	
		Red	

Code Construction

PLWALLY X XX X X XX X X

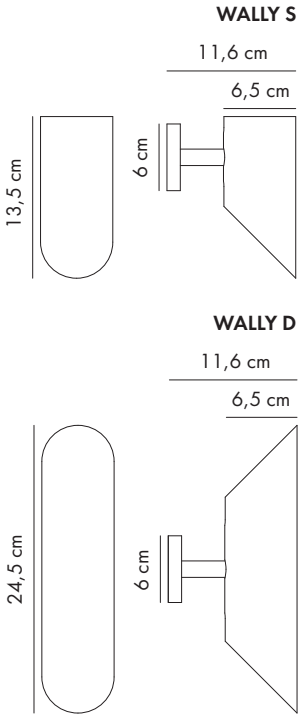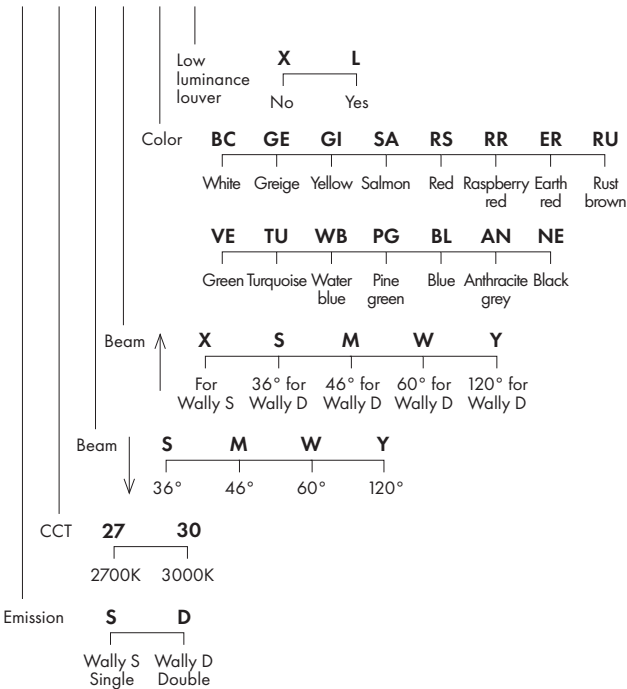

Made-to-measure cable available on request

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

24VDC		Min-Max fixtures	Hole mm
CEDLTC00136	On/off IP20 - Max 20W	1-2 WALLY S 1 WALLY D	Ø 60
CEDLTC00137	On/off IP20 - Max 70W	1-10 WALLY S 1-5 WALLY D	Ø 70
CEDALV00007	On/off IP67 - Max 36W	1-5 WALLY S 1-2 WALLY D	Ø 44
CEDALV00001	Dimmable IP20, PUSH, DALI2, 0/1-10V - Max 24W	1-3 WALLY S 1 WALLY D	Ø 45
CEDALV00004	Dimmable IP67, DALI2 - Max 24W	1-3 WALLY S 1 WALLY D	Ø 48

Ecodesign and Energy Labelling

WALLY S, WALLY D: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.