


Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Color

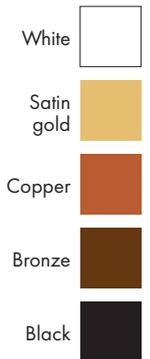

Projectors

Light Source: LED (led driver not included)

SLIM T6

CCT

2700K _ 540 lm

3000K _ 600 lm

6W 24VDC CRI 98

SLIM T10

CCT


2700K _ 840 lm

3000K _ 930 lm


10W 24VDC CRI 93

Code Construction


SYSMT XXX XX X XX X X

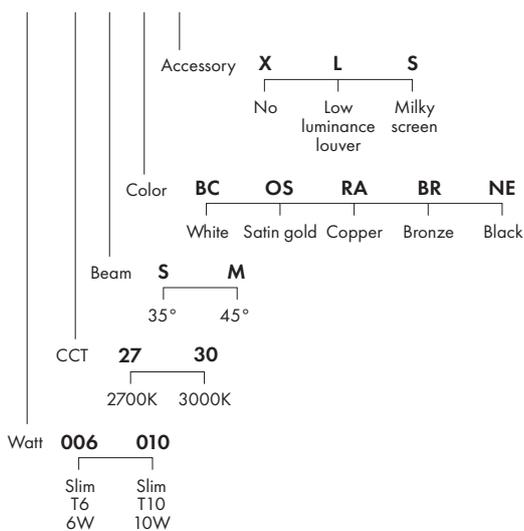

SLIM T6

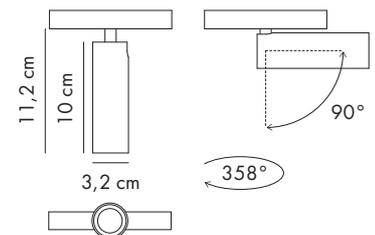

SLIM T10

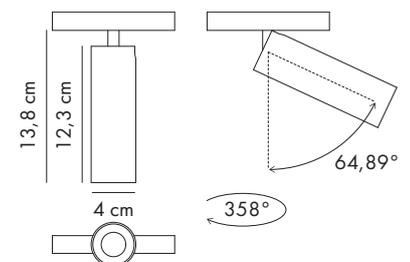

Accessories

Low luminance louver



Milky screen



Ecodesign and Energy Labelling

SLIM T6: light source with energy class **F** (2700K-3000K)

SLIM T10: light source with energy class **G** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end user.

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.