

Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Color

White



Satin gold



Copper



Bronze



Black



Steplights

Light Source: LED (led driver not included)

CCT

2700K _ 128 lm



3000K _ 133 lm

2W 500mA (V_i 2,9V) CRI 85

Series wiring

Code Construction


WADOT X XX X XX XXXX

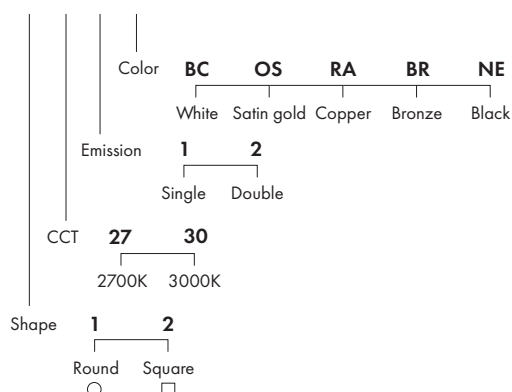

4,9 cm



4,9 cm



2,6 cm


0,74 cm

Hole Ø 3 cm

Accessories

ACCS1006XXXXX

Recessing box



ACCS1001XXXXX

Recessing box



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.




Drivers

500mA		Min-Max fixtures	Hole mm
CEDLTC00135	On/off IP20 - Max 14W	1-7	Ø 30
CEDLTC00140	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 27W	1-12	Ø 72
CEDACT00002	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-7	Ø 36
CEDLTC00142	Dimmable IP20, PUSH, IGBT-TRIAC - Max 24W	1-14	Ø 56

Ecodesign and Energy Labelling

DOT: light source with energy class **E** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.