

A selection of luminaires with exceptional optical and construction quality, designed to meet the lighting needs of outdoor spaces in residential and hospitality settings.

IP67 steplights

Light Source: LED (led driver not included)

CCT

2700K _ 101 lm



3000K _ 109 lm

1W 350mA (V, 2,9V) CRI 85

Series wiring

Code Construction


WAPEA XX XX XXXXXX

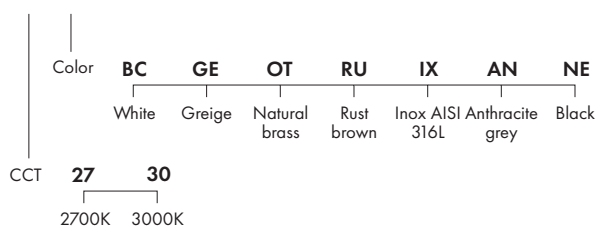

Accessories

ACCSLN01XXXXX

Recessing box



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

350mA		Min-Max fixtures	Hole mm
CEDLTC00134	On/off IP20 - Max 15W	1-11	Ø 30
CEDALV00005	On/off IP67 - Max 14,7W	1-12	Ø 44
CEDLTC00139	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 18,9W	1-12	Ø 72
CEDACT00001	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-11	Ø 36
CEDLTC00141	Dimmable IP20, PUSH, IGBT-TRIAC - Max 17W	1-14	Ø 56
CEDALV00002	Dimmable IP67, DALI 2 - Max 9,8W	2-8	Ø 44

Ecodesign and Energy Labelling

PEA: light source with energy class **E** (2700K) - **F** (3000K)



Light source (LED only)
non-replaceable by end
user.