

Lamps crafted for optimal performance, ensuring high luminous efficiency, superior emission quality, and precise beam control-versatile tools for designing lighting solutions in any indoor space.

Steplights

Light Source: LED (led driver not included)

CCT

2700K _ 89 lm



3000K _ 93 lm

1W 350mA (V, 2,9V) CRI 85

Series wiring

Code Construction


WASTE P X XX XX XXXX

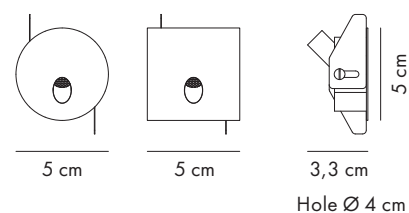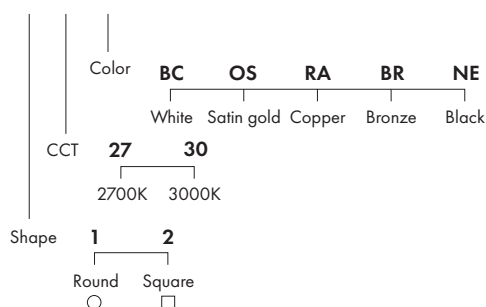

Accessories

ACCS1005XXXXX

Recessing box



Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.

Drivers

350mA		Min-Max fixtures	Hole mm
CEDLTC00134	On/off IP20 - Max 15W	1-11	Ø 30
CEDLTC00139	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 18,9W	1-12	Ø 72
CEDACT00001	Dimmable IP20, PUSH, DALI 2 - Max 12W	1-11	Ø 36
CEDLTC00141	Dimmable IP20, PUSH, IGBT-TRIAC - Max 17W	1-14	Ø 56

Ecodesign and Energy Labelling

STEP: light source with energy class **E** (2700K-3000K)



Light source (LED only)
non-replaceable by end
user.