

SPILLRAY EVO - Manuel Vivian












Crystal elements with refined geometries merge with structures engineered for optimal lighting performance, creating a dialogue of character and personality. These pieces assert a strong visual presence while delivering exceptional lighting solutions.

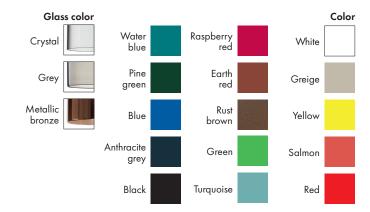



Materials: Metal, glass

Light Source: LED (led driver not included)

CCT 2700K _ 590 lm 3000K _ 650 lm

Code Construction

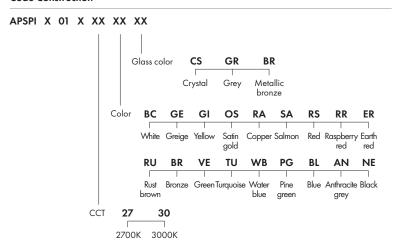




Drivers

24VDC		Min-Max fixtures
CEDMWC00207	On/off IP42 - Max 8W	1
CEDALV00001	Dimmable IP20, PUSH, DALI 2, 0/1-10V - Max 24W	1-3

Ecodesign and Energy Labelling

This luminaire contains a light source with the energy class **E**



Light source replaceable (LED only) by a qualified specialist of Axolight.

Nominal flux (lm) of the products are estimated on the LED sources, with tolerances defined by manufacturers.